

## SUCTION AND TRANSPORT HOSE - MEDIUM WEIGHT



I.1.3

## MASTER-PUR H

### Material

**hose wall:** 100 % pure polyester polyurethane. 30% more abrasion-resistant than polyether polyurethane

**spiral:** PU-coated spring steel wire

### Applications


- suction and transport hose for abrasive materials
- gaseous and liquid media
- suction of paper and textile fibers
- transport of small particled dusts and powders
- oil-spray extraction
- protection hose against mechanical pressure

### Properties

- highly abrasion-resistant
- resistant to oil and fuels
- gas-tight
- good chemical resistance
- resistant to solvents
- free of plastizisers and halogens
- UV- and ozone-resistant
- very flexible; light weight
- small bend radius
- improved pressure and vacuum characteristics
- high tensile and burst strength
- smooth inside, for optimum flow characteristics
- electrically conductive by grounding spiral

### Construction

- ① PU-coated spring steel spiral
- ② hose wall: polyester polyurethane
- ③ wall thickness between spirals .055"



### Temperature Range

- -40 °F up to +195 °F
- intermittent to +260 °F

### Chem. Resistance

see resistance table section no. 15

Technical Data, custom designs and forms of delivery see back page

## MASTER-PUR H

Dia (in.)	Positive (in. w.c.)	Negative (in. w.c.)	*Bending radius (in.)	Outer Dia (in.)	Weight (lbs./ft.)	Product code
2.0	1,166	320	3.48	2.44	0.37576	313-050-401
2.4	1,025	300	4.08	2.80	0.44286	313-060-401
2.6	965	270	4.48	3.00	0.48312	313-065-401
2.8	904	270	4.68	3.20	0.51667	313-070-401
3.0	804	240	5.04	3.48	0.55022	313-075-401
3.2	804	240	5.28	3.64	0.58377	313-080-401
3.6	663	210	5.96	4.04	0.65087	313-090-401
4.0	603	180	6.60	4.48	0.72468	313-100-401
4.4	543	180	7.16	4.84	0.79178	313-110-401
4.6	543	125	7.44	5.04	0.82533	313-115-401
4.8	522	125	7.76	5.24	0.86559	313-120-401
5.0	522	125	8.12	5.52	0.89914	313-125-401
5.2	522	125	8.36	5.64	0.93269	313-130-401
5.6	422	100	8.96	6.04	1.04676	313-140-401
6.0	422	100	9.68	6.52	1.11386	313-150-401
6.4	362	100	10.20	6.84	1.18767	313-160-401
6.8	362	75	10.80	7.24	1.26148	313-170-401
7.0	362	75	11.12	7.44	1.29503	313-175-401
7.2	301	75	11.40	7.64	1.33529	313-180-401
8.0	301	75	12.84	8.60	1.91906	313-200-401
9.0	241	50	14.12	9.48	2.15391	313-225-401
10.0	241	50	15.60	10.52	2.38876	313-250-401
11.0	181	50	17.04	11.52	2.62361	313-275-401
11.0	181	50	17.40	11.72	2.67058	313-280-401
12.0	181	50	18.60	12.52	2.85846	313-300-401
12.6	181	50	19.52	13.12	2.99937	313-315-401
13.0	181	50	20.12	13.52	3.09331	313-325-401
14.0	181	50	21.60	14.52	3.32816	313-350-401
16.0	121	27	24.60	16.52	3.79786	313-400-401

\* Referring to the inner side of the elbow of hose.

The above mentioned data refers to an average and ambient temperature of 68°F. Subject to technical changes and color variations. Please refer to technical data sheet when selecting hose.

### Delivery forms:

Standard production:

- Dia. 2" - 16"
- Color: clear
- Standard lengths: 25'

Available on request:

- with overprint
- special colors
- special lengths




## Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue  
La Center, Washington 98629 USA  
Ph. (800) 252-3993 - Fax (360) 263-9772  
web- PacAir.net - Email- Sales@PacAir.net



### Installation and connection possibilities (see register no. 11 and 12):



## CARFLEX SUPER + MASTER-PUR STEP



## CAR-GRIP

### Material

**clamp band:** galvanized steel  
**screw casing:** galvanized steel  
**bridge:** stainless steel

### Properties


- rust resistant
- easy to install
- extra strength

### Applications

- special hose clamps for securing CARFLEX SUPER and MASTER-PUR STEP hoses on mobile and stationary units

### Construction

Hose clamp with worm drive with hexagon recessed head screw and spot-welded bridge



Technical Data, custom designs and forms of delivery see back page

## CAR-GRIP

for CARFLEX-SUPER and MASTER-PUR STEP (Dia.)	Clamping range (in.)	Product code
2.4" thru 10"	2.4" thru 12"	531-060-100 thru 531-250-100

### Note:

CAR-GRIP worm drive hose clamps are only suitable for securing CARFLEX SUPER hoses. We recommend our standard worm drive hose clamps or heavy duty bolted clamps for securing other spiral hoses.

### Delivery forms:

**Standard production:**  
 ● clamping ranges from 2.4" - 12"

### Available on request:

- in stainless steel
- other clamping ranges



## Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue  
 La Center, Washington 98629 USA  
 Ph. (800) 252-3993 - Fax (360) 263-9772  
 web- PacAir.net - Email- Sales@PacAir.net



## HOSE REDUCER



11.5

## HOSE REDUCER

### Material

galvanized steel

### Applications


- for extending, connecting and attaching lightweight or medium weight hoses

### Properties

- easy to install
- lightweight
- resistant to corrosion

### Construction

reducer of rolled sheet steel with beadings on both ends



Technical Data, custom designs and forms of delivery see back page

## HOSE REDUCER

(Dia. 1)	(Dia. 2)	S Ga.	L1 (in.)	L2 (in.)	Product code
3" thru 12"	2" thru 10"	24	3.5"	3"	632-080-050 thru 632-300-250


### Delivery forms:

Standard production:

- galvanized steel

Available on request:

- special diameters
- stainless steel

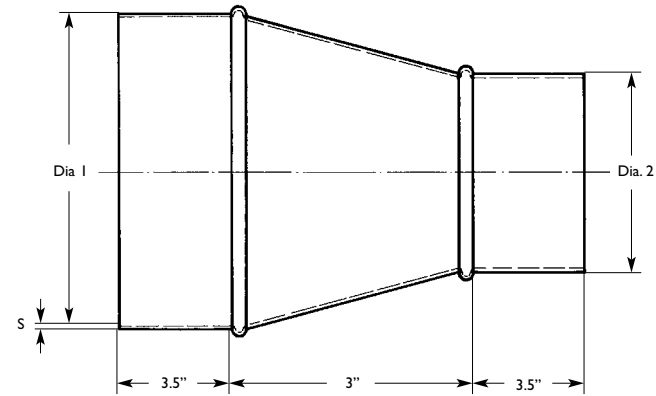

## Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue  
La Center, Washington 98629 USA  
Ph. (800) 252-3993 - Fax (360) 263-9772  
web- PacAir.net - Email- Sales@PacAir.net



## HOSE CONNECTOR



11.6

## HOSE CONNECTOR

### Material

galvanized steel

### Applications

- extending, connecting and attaching lightweight or medium weight hoses

### Properties

- easy to install
- lightweight
- resistant to corrosion

### Construction

rolled sheet steel with beandings



Technical Data, custom designs and forms of delivery see back page

## HOSE CONNECTOR

(Dia.)	Ga.	L (in.)	Product code
2" thru 36"	24	3.5"	630-050-100 thru 630-900-100


### Delivery forms:

Standard production:

- galvanized steel

Available on request:

- special sizes
- stainless steel



## Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue  
La Center, Washington 98629 USA  
Ph. (800) 252-3993 - Fax (360) 263-9772  
web- PacAir.net - Email- Sales@PacAir.net

