

EXHAUST GAS HOSE FOR EXHAUST GAS TEMPERATURES UP TO +570°F



6.3

CARFLEX 570

Material

hose wall: special-coated high temperature fabric
external helix: galvanized steel with additional plastic abrasion protector

Applications


- high stress when extracting exhaust gas from spark ignition or diesel engines, especially suitable for trucks or construction machines
- suction extraction of engine exhaust gases up to +570°F when exhaust gas funnels are used properly
- all usual suction extraction systems such as: hose reel, slotted channels, abovefloor and underfloor suction extraction

Properties

- vibration resistant
- high resistance to mechanical loadings
- flame resistant
- extremely flexible
- compressibility 1:5
- small bend radius
- super lightweight
- extra strength
- abrasion-resistant
- special clamping method guarantees high tensile strength between hose material and external helix

Construction

- ① external helix
- ② additional abrasion protector
- ③ hose wall: special-coated high-temperature fabric

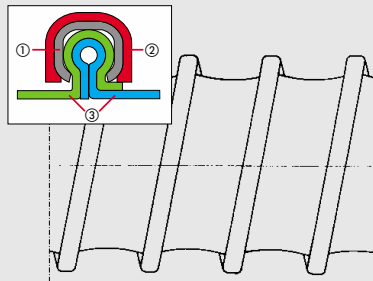

Temperature Range

- exhaust gas temperatures up to +570°F, short times up to +660°F when exhaust gas funnels are used properly and enough fresh air is utilized

Technical Data, custom designs and forms of delivery see back page

CARFLEX 570

Dia. (in.)	Outer (Dia.)	Negative (in. w.c.)	*Bending radius (in.)	Weight (lbs./ft.)	Product code
2.5	3.04	68	1.52	0.36905	241-063-119
3.0	3.56	56	1.84	0.32879	241-075-119
3.2	3.72	50	1.92	0.34221	241-080-119
4.0	4.68	32	2.40	0.90000	241-100-119
5.0	5.68	20	3.00	1.00000	241-125-119
6.0	6.68	14	3.60	1.16000	241-150-119
8.0	8.68	8	5.60	1.45000	241-200-119

* Referring to the inner side of the elbow of hose.

The above mentioned data refers to an average and ambient temperature of 68°F. Subject to technical changes and color variations. Please refer to technical data sheet when selecting hose.

Delivery forms:

Standard production:

- Dia. 2.5" - 8"
- Color:
 - hose wall green-grey
 - outer abrasion protector red
- Standard lengths 10', 25'

Available on request:

- special lengths
- special diameters from Dia. 2" - 20"
- fix lengths with mounted Clip-Grip-clamps
- abrasion protection profile in other colors
- custom design with other pitches and helix sizes




Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue
 La Center, Washington 98629 USA
 Ph. (800) 252-3993 - Fax (360) 263-9772
 web- PacAir.net - Email- Sales@PacAir.net



Installation and connection possibilities (see section no. 11 and 12):



SPECIAL HOSE CLAMP FOR MASTER-CLIP HOSES



CLIP-GRIP

Material

clamp band: galvanized steel
screw casing: galvanized steel
bridge: galvanized steel

Properties

- rust resistant
- easy to install
- extra strength

Applications

- special hose clamps for securing all types of hoses from the MASTER-CLIP series on mobile and stationary units

Construction

- hose clamp with one or more worm drive(s)
- with a hexagon head screw
- with one or more spot-welded bridges



Technical Data, custom designs and forms of delivery see back page

CLIP-GRIP

For MASTER-CLIP hoses (Dia.)	Clamping range (in.)	Product code
1.52" thru 36"	1.52" thru 36"	530-038-100 thru 530-900-100

Note:

CLIP-GRIP worm drive hose clamps are only suitable for securing MASTER-CLIP hoses. We recommend our standard worm drive hose clamps or heavy duty bolted clamps for securing other spiral hoses.

Delivery forms:

Standard production:

- clamping ranges from 1.52" - 36.2"

Available on request:

- in stainless steel
- other clamping ranges
- reinforced clamps with additional bridges



Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue
 La Center, Washington 98629 USA
 Ph. (800) 252-3993 - Fax (360) 263-9772
 web- PacAir.net - Email- Sales@PacAir.net



CARFLEX SUPER + MASTER-PUR STEP



11.2

CAR-GRIP

Material

clamp band: galvanized steel
screw casing: galvanized steel
bridge: stainless steel

Properties


- rust resistant
- easy to install
- extra strength

Applications

- special hose clamps for securing CARFLEX SUPER and MASTER-PUR STEP hoses on mobile and stationary units

Construction

Hose clamp with worm drive with hexagon recessed head screw and spot-welded bridge



Technical Data, custom designs and forms of delivery see back page

CAR-GRIP

for CARFLEX-SUPER and MASTER-PUR STEP (Dia.)	Clamping range (in.)	Product code
2.4" thru 10"	2.4" thru 12"	531-060-100 thru 531-250-100

Note:

CAR-GRIP worm drive hose clamps are only suitable for securing CARFLEX SUPER hoses. We recommend our standard worm drive hose clamps or heavy duty bolted clamps for securing other spiral hoses.

Delivery forms:

Standard production:
 ● clamping ranges from 2.4" - 12"

Available on request:

- in stainless steel
- other clamping ranges



Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue
 La Center, Washington 98629 USA
 Ph. (800) 252-3993 - Fax (360) 263-9772
 web- PacAir.net - Email- Sales@PacAir.net



HOSE CLAMP, BOLT CLAMP



11.3

HOSE CLAMP, BOLT CLAMP

Material

clamp band: galvanized steel
screws: galvanized steel

Applications

- for attaching medium-weight and heavy spiral hoses onto connecting branches on mobile and stationary units

Properties

- rust resistant
- extra strength
- band width .70" - 1.0"
- band thickness .023" - .063"

Construction

Large strip hose clamp with fastening lug



Technical Data, custom designs and forms of delivery see back page

HOSE CLAMP, BOLT CLAMP

Clamping range (in.)	Width x thickness (in.)	Product code
1.25" thru 20"	.80" x .03" thru 1.00" x .04"	621-032-115 thru 621-500-115

Note:

Heavy duty bolted clamps are suitable for the mounting of medium and heavy weight spiral hose types. For the mounting of lightweight hose qualities we recommend worm drive hose clamps.

Delivery forms:

Standard production:
● clamping ranges from 1.25" - 20"

Available on request:

- in stainless steel
- other clamping ranges



Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue
La Center, Washington 98629 USA
Ph. (800) 252-3993 - Fax (360) 263-9772
web- PacAir.net - Email- Sales@PacAir.net



HOSE CLAMP WITH WORM GEAR DRIVE



11.4

HOSE CLAMP WITH WORM GEAR DRIVE

Material

clamp band: galvanized steel
screw casing: galvanized steel

Properties


- rust resistant
- extra strength

Applications

- for attaching light spiral hoses onto connecting branches on mobile and stationary units

Construction

one-piece hose band clamps with a hexagon head screw, recessed



Technical Data, custom designs and forms of delivery see back page

HOSE CLAMP WITH WORM GEAR DRIVE

Clamping range (in.)	Product code
1" thru 20"	620-025-100 thru 620-500-100

Delivery forms:

Standard production:
● clamping ranges from 1" - 20"

Available on request:

- in stainless steel
- other clamping ranges

Note:

Worm drive hose clamps are suitable for the mounting of lightweight spiral hose types. For the mounting of heavy weight hose qualities we recommend the heavy duty bolted clamps.



Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue
La Center, Washington 98629 USA
Ph. (800) 252-3993 - Fax (360) 263-9772
web- PacAir.net - Email- Sales@PacAir.net



HOSE REDUCER



11.5

HOSE REDUCER

Material

galvanized steel

Applications

- for extending, connecting and attaching lightweight or medium weight hoses

Properties

- easy to install
- lightweight
- resistant to corrosion

Construction

reducer of rolled sheet steel with beadings on both ends



Technical Data, custom designs and forms of delivery see back page

HOSE REDUCER

(Dia. 1)	(Dia. 2)	S Ga.	L1 (in.)	L2 (in.)	Product code
3" thru 12"	2" thru 10"	24	3.5"	3"	632-080-050 thru 632-300-250

Delivery forms:

Standard production:

- galvanized steel

Available on request:

- special diameters
- stainless steel



Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue
La Center, Washington 98629 USA
Ph. (800) 252-3993 - Fax (360) 263-9772
web- PacAir.net - Email- Sales@PacAir.net



HOSE CONNECTOR



11.6

HOSE CONNECTOR

Material

galvanized steel

Applications

- extending, connecting and attaching lightweight or medium weight hoses

Properties

- easy to install
- lightweight
- resistant to corrosion

Construction

rolled sheet steel with beandings



Technical Data, custom designs and forms of delivery see back page

HOSE CONNECTOR

(Dia.)	Ga.	L (in.)	Product code
2" thru 36"	24	3.5"	630-050-100 thru 630-900-100

Delivery forms:

Standard production:

- galvanized steel

Available on request:

- special sizes
- stainless steel



Pacific Air Consultants, Inc.

P.O. Box 426 - 33100 NE Ivy Avenue
La Center, Washington 98629 USA
Ph. (800) 252-3993 - Fax (360) 263-9772
web- PacAir.net - Email- Sales@PacAir.net

